


環境の注記
当社の定めるグリーン調達ガイドライン (ホームページ参照) を遵守すること。

NOTES OF ENVIRONMENT
Conform to the Guideline for Green Procurement which our company defines.
(Refer to homepage)

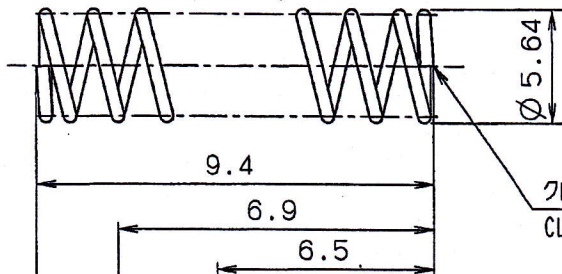

クローズドエンド(無研削) [両端]
CLOSED END (UNGROUND)
(BOTH EDGES)

荷重 LOAD 0.49N ± 0.05 N

荷重 LOAD 0.57N ± 0.06 N

円筒圧縮コイルばね要目表
TABLE OF ESSENTIALS FOR CYLINDRICALLY COILED COMPRESSION SPRING

材料 MATERIAL	表題欄参照 SEE TITLE BLOCK	熱処理 HEAT TREATMENT	低温焼なまし LOW TEMPERATURE ANNEALING
材料の直径 mm DIAMETER OF MATERIAL	0.32	防せい処理 RUST PREVENTIVE TREATMENT	-
コイル外径 mm OUTSIDE DIAMETER OF COIL	5.64	ばね定数 N/mm SPRING RATE	0.20
有効巻数 ACTIVE COILS	3.5	最大応力 N/mm ² MAXIMUM STRESS	254
総巻数 TOTAL COILS	5.5	密着高さ mm SOLID LENGTH	(2.1)
巻方向 DIRECTION OF HELIX	自由 FREE		

注記)
1. 脱脂処理のこと

NOTES)
1. TREATMENT MUST BE DEGREASING.

4 pcs / set

MATERIAL: _____ SPEC./REMARKS: _____
TREATMENT/FINISH: _____

PREVIOUS DRAWING NO. REF MASS(g) CALC VM(cm³) NAME
SPG-GID-PUSH_GA

東芝テック株式会社
TOSHIBA TEC CORPORATION

SCALE SIZE PAGE PROCESS DRAWING NO. BASIC CODE SUB REV Δ
A4 1/1 SPRING 6LK54350 0 00

PAGE COMBINATION LIST
NO. ISSUE NO. 6: _____
2: 7: _____
3: 8: _____
4: 9: _____
5: 10: _____

EDITED BY DESIGN CHECK 2015/10/08 APPROVE 2015/10/09 INITIAL ISSUE NO.
ADAM_NX S. TANIGUCHI 2015/09/28 N. Ahoji S. Nomura JVB46267

OT RANK METRIC COUNT MODIFY CHECK APPROVE LATEST ISSUE NO.
C3 mm

USED IN
Main: **FORMAL ISSUE / JVB46267-20151009-1508**

2015-10-09-0844

29/10/15