


FOR REFERENCE ONLY IF PRINTED
 DRAWING STATUS:
 CAD DATABASE FILENAME: INNER_SRPING_800MHZ

REV.	DESCRIPTION.	DATE.	ECO NO.	BY.
1	Released for Prototype.	22-Oct-18	N/A	KY Ho
2	Dim Changed from 20.40 to 18.0mm.	10-Jan-18	N/A	KY Ho
3	Dim Changed from 18.0mm to 17mm.	27-Sep-19	N/A	KY Ho
4	Dim changed from 4.0 to 3.0mm and changed critical point.	22-Nov-19	N/A	KY Ho

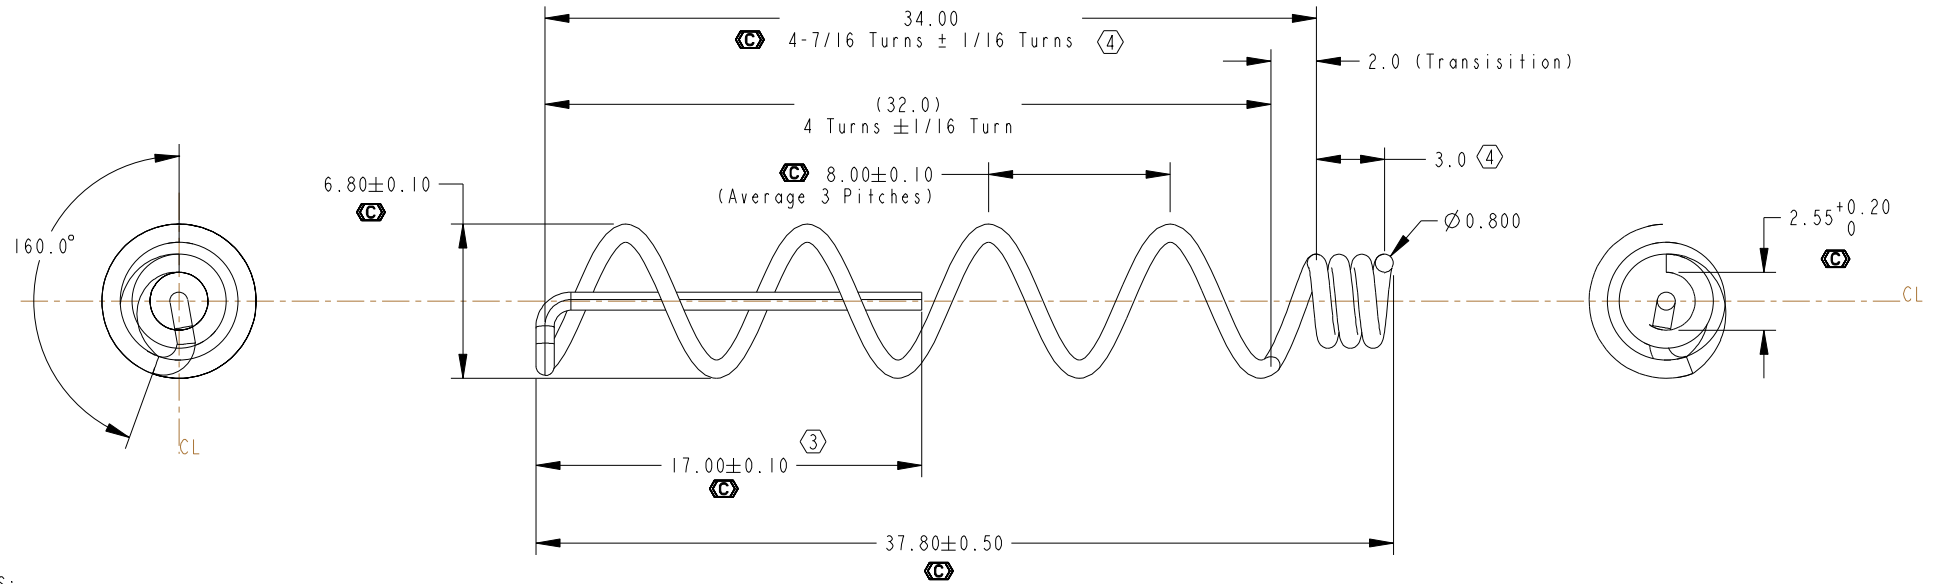

NOTES:

- MATERIAL : $\varnothing 0.8\text{mm}$ MUSIC WIRE (C)
- PLATING: COPPER PLATED
THICKNESS: 8 TO 12 MICRON
- ALL DIMENSIONS ARE IN MILLIMETERS
- CAD CONTROLLED GEOMETRY
- MAX BURR 0.05MM. NO LOOSE BURRS PERMITTED
- PARTS SHALL BE FREE OF LOOSE BURRS, OILS AND DEBRIS.
- NO CHANGE IN MATERIAL AND SHEET THICKNESS IS ALLOWED WITHOUT PRIOR WRITTEN APPROVAL BY EMITS TECHNOLOGY.
- DO NOT SCALE DRAWING.
- PARTS SHALL BE PACKAGED IN A MANNER TO PREVENT BOWING, SCRATCHING OR DAMAGE DURING SHIPMENT (FOR EXAMPLE USE TRAY).
- DIMENSIONS TO THEORETICAL INTERSECTION (TTI).
- ALL MATERIALS, PLATING AND PROCESSES USED TO FABRICATE THE COMPONENT SPECIFIED ON THIS DOCUMENT MUST COMPLY WITH THE RoHS DIRECTIVE 2002/95EC AND GP SS-00259 REQUIREMENTS.

SCALE 3.000

ITEM NO.	QTY.	PART NUMBER	DESCRIPTION	MATERIAL
TOLERANCES (UNLESS SPECIFIED): X.X ±0.1 X.XX ±0.05 ANGLES ±1° CONCENTRICITY ±0.05 PERPENDICULARITY ±0.05 FLATNESS ±0.05 BREAK ALL CORNERS R0.25 MAX (C) INDICATES CRITICAL DIMENSION (ST) INDICATES SPC REQUIRED Cpk < 1.5 REQUIRES CORRECTIVE ACTION DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994				
EMITS PROPRIETARY - THE DRAWING ON THIS PRINT AND INFORMATION THEREWITH ARE PROPRIETARY TO EMITS, AND SHALL NOT TO BE DISCUSS IN WHOLE OR IN PART WITHOUT EMITS CONCENT.				
METRIC UNITS = mm			MATERIAL: See Notes	
DRAWN: KY Ho			Emits Technology Sdn. Bhd. Plot 24 hilir Sungai Keluang 3,Fasa 4, Bayan Lepas Free Industrial Zone, 11900 Penang, Malaysia.	
CHECKED: CS Por			Inner Spring 806-870MHz/GPS, PT350 65cm	
APPROVED: BL Loy			A4 SIZE	
SCALE: 1.000		REV. 4		PART NUMBER: SPR301810232
				PAGE: 1 OF 1

PROJECT DATABASE LOCATION: