


REV.	DESCRIPTION.	DATE.	ECO NO.	BY.
1	Pre-Released	04-OCT-19	N/A	Zul
2	Dim changed from 4.58 to 4.30 (Add 1/2 Turn).	25-Oct-19	N/A	KY Ho

FOR REFERENCE ONLY IF PRINTED  
 DRAWING STATUS:  
 CAD DATABASE FILENAME: INNER\_SPRING\_380-430MHZ

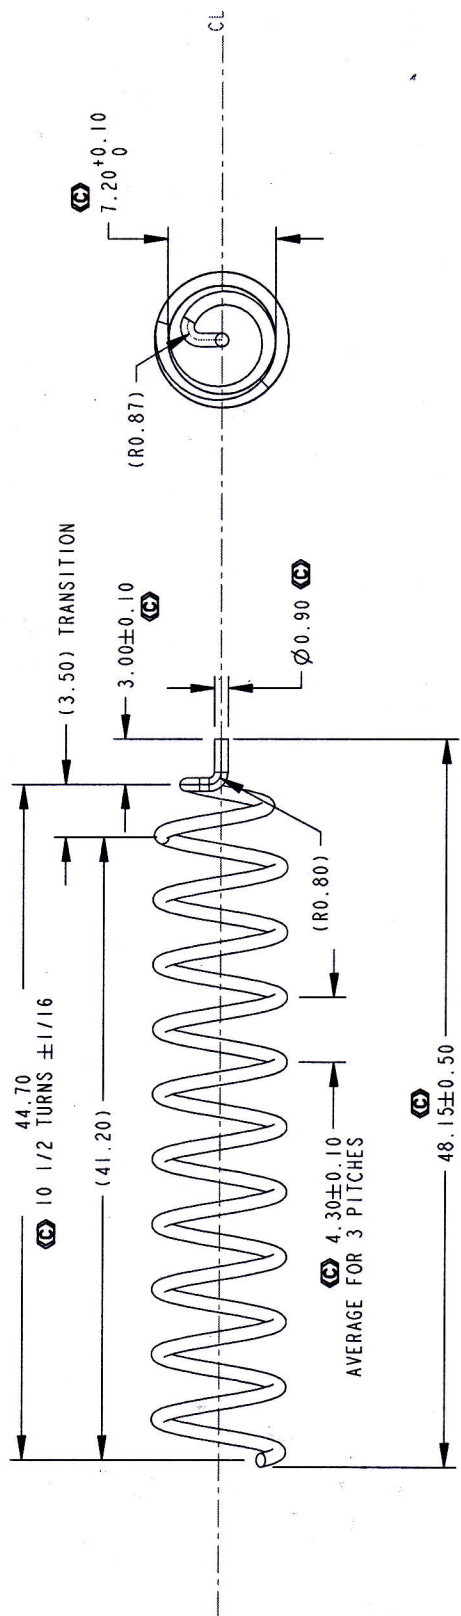

- NOTES:
1. MATERIAL :  $\varnothing$ 0.90 mm MUSIC WIRE
  2. PLATING: COPPER PLATED
  3. THICKNESS: 6 TO 12 MICRON (C)
  4. ALL DIMENSIONS ARE IN MILLIMETERS
  5. MAX BURR 0.05MM, NO LOOSE BURRS PERMITTED
  6. PARTS SHALL BE FREE OF LOOSE BURRS, OILS AND DEBRIS.
  7. NO CHANGE IN MATERIAL AND SHEET THICKNESS IS ALLOWED WITHOUT PRIOR WRITTEN APPROVAL BY EMITS TECHNOLOGY.
  8. DO NOT SCALE DRAWING.
  9. PARTS SHALL BE PACKAGED IN A MANNER TO PREVENT BOWING, SCRATCHING OR DAMAGE DURING SHIPMENT (FOR EXAMPLE USE TRAY).
  10. DIMENSIONS TO THEORETICAL INTERSECTION (TTI).
  11. ALL MATERIALS, PLATING AND PROCESSES USED TO FABRICATE THE COMPONENT SPECIFIED ON THIS DOCUMENT MUST COMPLY WITH THE ROHS DIRECTIVE 2002/95EC AND GP SS-00259 REQUIREMENTS.

EMITS PROPRIETARY - THE DRAWING ON THIS PRINT AND INFORMATION THEREWITH ARE PROPRIETARY TO EMITS, AND SHALL NOT BE DISCUSS IN WHOLE OR IN PART WITHOUT EMITS CONSENT.		<b>emits Technology Sdn. Bhd.</b> Plot 24, Hilir Sungai Keluang 3, Fasa 4, Boyan Lepos Free Industrial Zone, 11900 Pasang.	
METRIC UNITS = mm 		MATERIAL: SEE NOTES	
DRAWN: KY Ho CHECKED: KY Ho APPROVED: BL Loy		FINISH: SEE NOTES	
TOLERANCES (UNLESS SPECIFIED): X, Y $\pm 0.1$ ANGLES $\pm 0.05$ CONCENTRICITY $\pm 0.05$ PERPENDICULARITY $\pm 0.05$ FLATNESS $\pm 0.05$ BREAK ALL CORNERS R0.25 MAX (C) INDICATES CRITICAL DIMENSION (S) INDICATES SPC REQUIRED Cpk < 1.5 REQUIRES CORRECTIVE ACTION DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994		Inner Spring, Aragorn Slim 60mm SCALE: 2.000 REV. 2 PART NUMBER: SPR301910429 PAGE: 1 OF 1	

PROJECT DATABASE LOCATION: WINDCHILL