


FOR REFERENCE ONLY IF PRINTED		DRAWING STATUS:	
CAD DATABASE FILENAME: INNER-SPRING-380-430MHZ			
REV.	DESCRIPTION.	DATE.	ECO NO.
4	Add 1-1/4 Turn.	29-OCT-19	N/A
			BY:
			KY Ho

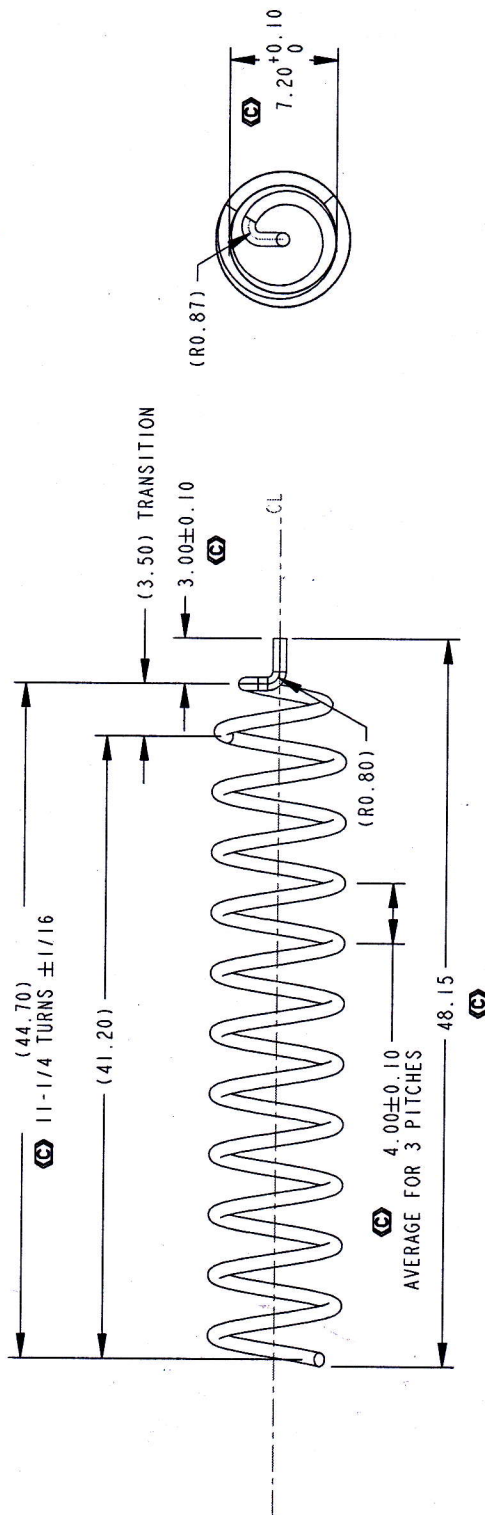

- NOTES:
1. MATERIAL :  $\varnothing$  0.90 mm MUSIC WIRE
  2. PLATING: COPPER PLATED
  3. THICKNESS: 6 TO 12 MICRON  $\text{C}$
  4. ALL DIMENSIONS ARE IN MILLIMETERS
  5. MAX BURR 0.05MM. NO LOOSE BURRS PERMITTED
  6. PARTS SHALL BE FREE OF LOOSE BURRS, OILS AND DEBRIS.
  7. NO CHANGE IN MATERIAL AND SHEET THICKNESS IS ALLOWED WITHOUT PRIOR WRITTEN APPROVAL BY EMITS TECHNOLOGY.
  8. DO NOT SCALE DRAWING.
  9. PARTS SHALL BE PACKAGED IN A MANNER TO PREVENT BOWING, SCRATCHING OR DAMAGE DURING SHIPMENT (FOR EXAMPLE USE TRAY).
  10. DIMENSIONS TO THEORETICAL INTERSECTION (TTI).
  11. ALL MATERIALS, PLATING AND PROCESSES USED TO FABRICATE THE COMPONENT SPECIFIED ON THIS DOCUMENT MUST COMPLY WITH THE RoHS DIRECTIVE 2002/95/EC AND GP SS-00259 REQUIREMENTS.

EMITS PROPRIETARY - THE DRAWING ON THIS PRINT AND INFORMATION THEREWITH ARE PROPRIETARY TO EMITS, AND SHALL NOT BE DISCUSS IN WHOLE OR IN PART WITHOUT EMITS CONCENT.		<b>emits Technology Sdn. Bhd.</b>	
MATERIAL: SEE NOTES		Plot 24, Hilir Sungai Keluang 3, Fasa 4, Bayan Lepas Free Industrial Zone, 11900 Penang.	
METRIC UNITS = mm	FINISH: SEE NOTES	<b>Inner Spring, Aragorn Slim 60mm</b>	
	CHECKED: KY Ho	SCALE: 2.000	PART NUMBER: <b>SPRS01910429</b>
DRAWN: ZUL	APPROVED: CS POR	REV. 4	PAGE: 1 OF 1
TOLERANCES (UNLESS SPECIFIED): X.X ±0.05 X.XX ±P ANGLES ±P CONCENTRICITY ±0.05 PERPENDICULARITY ±0.05 FLATNESS ±0.05 BREAK ALL CORNERS R0.25 MAX $\text{C}$ INDICATES CRITICAL DIMENSION $\text{S}$ INDICATES SPC REQUIRED Cpk < 1.5 REQUIRES CORRECTIVE ACTION DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994		A4 SIZE	

PROJECT DATABASE LOCATION: WINDCHILL